



ANNI CERAMIC
Blanco



ANNI CERAMIC
Negro



ANNI CERAMIC
Nieve

PRODUCT INFORMATION:

Thermal energy:	33,9 kWh
Energy efficiency:	82,9 %
CO%:	0,10 %
Heat storage capacity:	
100 %	1,5 h
50 %	11,1 h
25 %	19,9 h

PRODUCT NUMBER:

Product	Product number	Weight kg	Height mm
ANNI CERAMIC	1 THC	790	960

NEEDED FOR ASSEMBLY:

* Mortar 1 x 25 kg (not included in NunnaUuni delivery)


PRODUCT INFORMATION

	BAKING OVEN / BAKING SPACE		FIREWOOD			FLUE CALCULATION VALUES ⁽¹⁾				MAX FLUE TEMPERATURE IN THE SAFETY TEST
	Width [mm]	Depth [mm]	Length [cm]	Max amount of wood [kg]	Length fireplace / cooker [cm]	Flue gas temperature [°C]	Min. flue draught [Pa]	Mass flow [g/s]	Flue connection Ø (min.)	Temperature °C
Anni Ceramic	-	-	33	9	-	215	-12	17,9	150	371

FLUE CONNECTION TABLE

	RECOMMENDED FLUE [mm]				FLUE CONNECTION MEASUREMENTS [mm]			INCOMING AIR		
	approx. 150x150	approx. 150x200	approx. 150x300	round Ø	[A]	[B]	[C]	Incoming air pipe location L [mm]	Replacement air unit	Burning air approx. m³/h
Anni Ceramic	x	x	-	150–180	150–200	240	390	370	920006	35–50

SAFETY DISTANCES TO COMBUSTIBLE MATERIALS

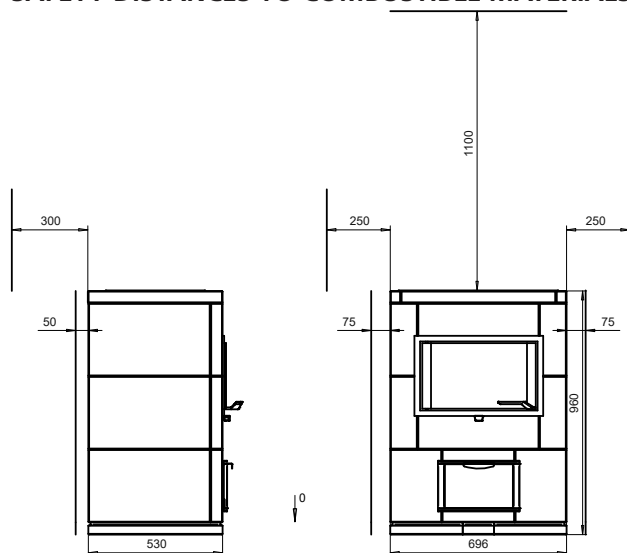

¹⁾ The flue calculation values apply for countries that require flue calculation in accordance with the DIN 18160 and DIN EN 13384 standards. It is recommendable to contact chimney sweeper beforehand.

NOTES!

The recommended minimum flue height is 5 m with Ø 150 mm. In countries where the flue calculation is required, should the calculation be done according to the instructions and regulations of the flue calculation.

A damper designed for adjusting the draft is always recommended for a flue connection or flue. In the picture you can see the Finnish version.

Country- and region-specific regulations must be adhered to when installing the fireplace

