


KOOK 60 4.0

Wood Insertion Cookers



Nominal power	kW	6,2
Reduced power	kW	-
Introduced thermal power (max)	kW	9,5
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	84,1
Reduced efficiency	%	-
Heating volume (min-max)	m ³	149
Nominal CO at 13% O ₂	%	0,097
Reduced CO at 13% O ₂	%	-
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	1209
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	69
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	78
Dust content at 13% O ₂ (min- max)	mg/Nm ³	29,8
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	-
Combustible		Legna
Hourly consumption (min-max)	kg/h	1,7
Autonomy (min-max)	h	-
Ignition electrical absorption (max)	W	-
Operating electrical absorption (max)	W	50
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Exhaust diameter	mm	140
Combustion air inlet diameter	mm	-
Mass of smoke (min-max)	g/sec	7,3
Exhaust fumes temperature (max)	°C	168
Net weight	kg	121,6
Gross weight	kg	135,8
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-

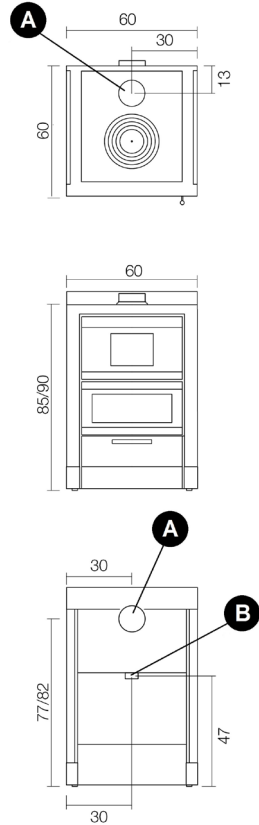

Art. 15A B-VG 2015
BImSchV 2016
Regensburg
München
Stuttgart
Aachen



MATCH

71180060	NEUTRAL STRUCTURE	EAN 8053859010548
71180061	NEUTRAL STRUCTURE with ventilation + light kit	EAN 8053859010555
6915036	Stainless steel	EAN 8033123616829
6915035	Anthracite steel	EAN 8033123616812
6915051	White steel	EAN 8033123617116
6915034	Black steel	EAN 8033123616805

PLUS



Cooking



Central Top and back exhaust



Refractory stone inner with 2nd combustion air




OPTIONAL Ventilation + light kit



View on the oven


STOVE PACKING



L (cm)	H (cm)	P (cm)
77	100,5	79


VOLUME (m ³)
0,61

LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	60	13,5	80

STOCKING



TRANSPORT

