




Nominal power	kW	10
Reduced power	kW	3
Introduced thermal power (max)	kW	11
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	91
Reduced efficiency	%	94,5
Heating volume (min-max)	m ³	72 - 240
Nominal CO at 13% O ₂	%	0,0095
Reduced CO at 13% O ₂	%	0,0139
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	174 - 119
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	5,0 - 4,0
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	108 - 104
Dust content at 13% O ₂ (min- max)	mg/Nm ³	9,9 - 16,5
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	15
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,66 - 2,24
Autonomy (min-max)	h	6,7 - 22,7
Ignition electrical absorption (max)	W	340
Operating electrical absorption (max)	W	51
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	10
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	2,5 - 5,6
Exhaust fumes temperature (max)	°C	215
Net weight	kg	103
Gross weight	kg	121
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	C
Ducting capability up to	m	6



Art. 15A-B-VG 2015
Bismarck 2015
Regensburg
München
Stuttgart
Aachen

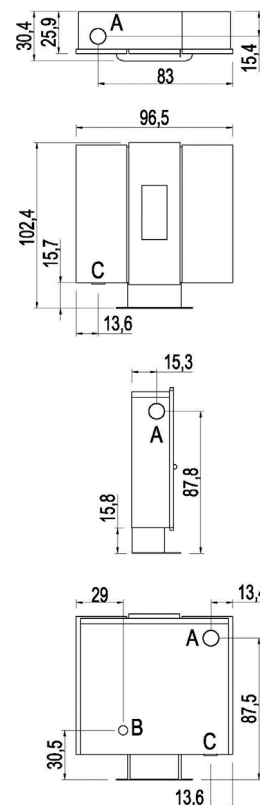

MATCH

7017032	NEUTRAL STRUCTURE	EAN 8033123618311
6913027	Ivory majolica	EAN 8033123612685
6913026	Maiolica rossoRed majolica	EAN 8033123612920
6913025	White steel	EAN 8033123612876
6913024	Red steel	EAN 8033123612883

PLUS



Cast iron burning pot



Aluminium Auger



Upper, back and lateral exhaust



Remote control



Sealed chamber



Connection to the room thermostat



Concentric flue kit (optional)



Wi-Fi kit (optional)



Duction with 1 independent motor




Comfort mode



Daily weekly programming


STOVE PACKING



L (cm)	H (cm)	P (cm)
120	54,6	100

VOLUME (m ³)
0,66

LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	37,6	10	98,5
majolica	37,6	10	98,5

STOCKING

MAX. 3	Nr (max)
2	3
1	

TRANSPORT

78 pcs
