




Nominal power	kW	4,9
Reduced power	kW	2,5
Introduced thermal power (max)	kW	5,5
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	90
Reduced efficiency	%	91,5
Heating volume (min-max)	m ³	60 - 118
Nominal CO at 13% O ₂	%	0,0053
Reduced CO at 13% O ₂	%	0,0188
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	235 - 67
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	7,0 - 4,0
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	121 - 130
Dust content at 13% O ₂ (min- max)	mg/Nm ³	20 - 18
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	12
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,57 - 1,17
Autonomy (min-max)	h	10,3 - 21,1
Ignition electrical absorption (max)	W	345
Operating electrical absorption (max)	W	62
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	2,7 - 4,0
Exhaust fumes temperature (max)	°C	156
Net weight	kg	55
Gross weight	kg	68
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-



BlmSchV 2015
Regensburg
München
Stuttgart
Aachen
EN 14785:2006

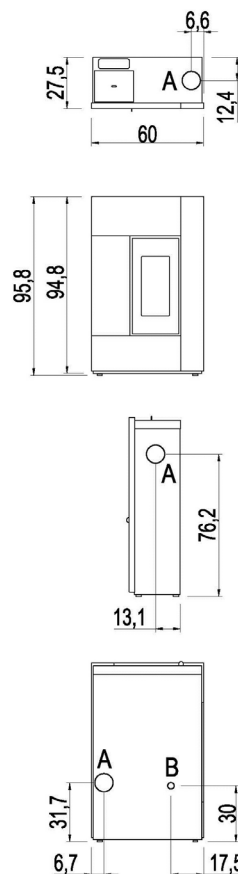

MATCH

7019025	Anthracite steel	EAN 8053859010937
7019023	White steel	EAN 8053859010821
7019022	Red steel	EAN 8053859010814

PLUS



Cast iron burning pot



Sealed chamber



Upper, back and lateral exhaust



Cast iron door



Wi-Fi kit (optional)




Connection to the room thermostat



Daily weekly programming


STOVE PACKING



L (cm)	H (cm)	P (cm)
107	44,8	80

VOLUME (m ³)
0,38

LINING PACKING




L (cm)	H (cm)	P (cm)

STOCKING

MAX. 5	
4	
3	
2	
1	

Nr (max)
5

TRANSPORT



180 pcs